



Doosan Infracore  
Forklifts

## Pneumatic Forklift Trucks

D50S / D60S / D70S / D80S / D90S-5

G50S / G60S / G70S-5

5,000kg to 9,000kg Capacity

**PRO5**  
SERIES

**PRO5**  
SERIES



**G50S / G60S / G70S-5**  
5,000kg 6,000kg 7,000kg  
LP Gas ; Pneumatic Tire



**D50S / D60S / D70S / D80S / D90S-5**  
5,000kg 6,000kg 7,000kg 8,000kg 9,000kg  
Diesel ; Pneumatic Tire



PSC0704B1 (Apr.2007)

**DOOSAN** Doosan Infracore  
Forklifts

Head Office : 7-11, Hwasu-Dong, Dong-Gu, Incheon, Korea.  
Tel : 82-32-211-5011 Fax : 82-32-211-5412  
Seoul Office : 22nd floor, Doosan Tower Bldg, Euljiro 6-Ga  
Jung-Gu, Seoul, Korea.  
Tel : 82-2-3398-8633 Fax : 82-2-3398-8619  
Web site : <http://iv.doosaninfracore.co.kr/eng>

AUTHORIZED DEALER

Product and specifications are subject to improvement and change without notice.

**Made to Order...  
For Your Heavy Duty Operation !**

Doosans D60S & D80S Series has achieved an outstanding reputation for delivering power and performance in the toughest applications.



● Here's What You'll Get With This New Redesigned series :

- ✓ *Optimized Operator Comfort & Safety*
- ✓ *Proven and Durable Components*
- ✓ *High Powered and Fuel efficient Diesel and LPG Engine for High Performance*
- *Low emissions and Minimal Vibration*
- ✓ *Enhanced Maintenance and Serviceability*
- ✓ *Virtually Maintenance-free Oil cooled Disc Brakes(Optional)*
- ✓ *2 or 3 Speed Full Autoshift Transmission*
- ✓ *Lift, Tilt Locking, Pilot Operated Fatigue-less Hydraulic Control Valve and Levers*
- ✓ *OSS(Operator Sensing System)*
- ✓ *A Variety of Operator Friendly Features*

# Our User Friendly Operator Compartment will Give Your Drivers Everything They Need.



To keep drivers running at peak efficiency we've made operator comfort a top priority

## ● Easy-To-Read integrated Instrument Panel

Engine coolant temperature, transmission oil temperature, engine RPM meter, fuel level gauge and hour meter keeps the driver aware of the machine's operating conditions. Engine oil pressure, alternator voltage, water separator gauge and pre-heater illuminates to alert operator to any problem.



## ● Convenience Package

Deck mounted control valve levers simplify hydraulic actuation Convenience tray keeps paperwork and supplies organized and handy.



## ● High Visibility Overhead Guard and Front-end

Wider mast window, repositioned hydraulic hoses and flat bar style overhead guard optimizes operator sight lines forward, up and to the load.



## ● Auto tilt leveling (optional)

Easily returns the mast to upright vertical position with the simple push of a button.



## ● Deluxe Suspension Seat with OSS(Operator Sensing System)

A comfortable deluxe suspension seat with OSS(operator sensing system), a large seatback angle, longer seat travel length and operator's weight resistance on front side allow multiple adjustments for optimum seating comfort.



## ● Spacious Leg Room & Operator Comfort

The neat and wide-open floorboard provides operator with plenty of foot room to make entry and exit a breeze.





# A Hallmark of Durability and Reliability



DRIVE THE DIFFERENCE...

*Doosan's Goal is to Make Your Material Handling Organization as Efficient and Reliable as Possible. The Durability and Reliability of Our Forklifts Will Aid In Minimizing Down Time and Help Reduce Total Maintenance Cost.*



## ● Doosan Infracore DB58S (2speed : 69kW, 3speed : 74kW)

This powerful 6-cylinder 5.8L diesel engine delivers excellent power to meet the needs of the most demanding applications. DB58S diesel engines comply with EPA emission regulations.



## ● GM V6 4.3L (69 kW)

The highly efficient and powerful GM 4.3L LP Gas engine has time-proven durability. It's low noise level and minimal vibration will add to operators comfort.





DRIVE DOOSAN !

**Proven Quality,  
Responsive Service and  
A Reliable Partner....**

After sales servicing of Doosan forklifts is available from the selling dealership backed by Doosan's own customer service center. And Doosan provides 100% parts inventory to insure any downtime is minimized.

When you own a Doosan forklift, our high quality, responsive customer support team comes with it.

The Doosan network starts with your local dealer and ends with a national team of highly qualified and experienced personnel standing ready to support all your material handling needs.

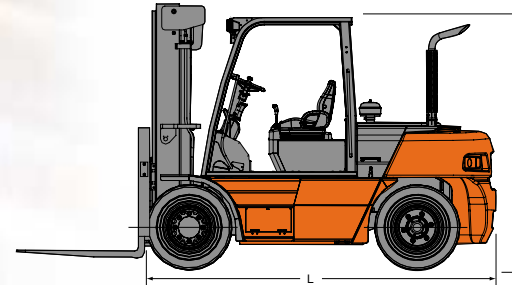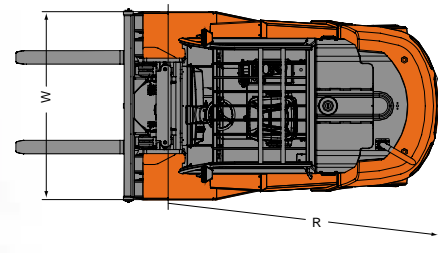

**Option Availability**

Options	D50/60/70S-5	D80/90S-5	G50/60/70S-5
Fuel Cap with Key	○	○	n/a
Precleaner	○	○	○
Vertical Exhaust Tube	●	●	○
Catalytic Muffler	○	○	○
Air conditioner	○	○	○
Non Marking Tire(Solid)	○	○	○
Spark Arrestor(w,w/o C/B)	○	○	n/a
Mono Pad Foot Direction and Acceleration Control	○	○	○
AutoShift-3Speed (Single,Dual Tire)	●	●	○
AutoShift-2Speed (Single,Dual Tire)	○	●	○
Engine Shutdown	○	○	○
Swingdown LP MTG	n/a	n/a	●
Lift and Tilt locking Hydraulic Control Valve	●	●	●
Auto Tilt Leveling	○	○	○
Hydraulic Accumulator	○	○	○
Integral fork mover	○	○	○
Integral Side shift and forkmover	○	○	○
Hook on Sideshifter	○	○	○
UL LPS,DS Rating	○	○	○

**Main Specification**

	Sales Model	D50S-5	D60S-5	D70S-5	D80S-5	D90S-5
Rated Load Capacity	kg	5000	6000	7000	8000	9000
Load Center	mm	600	600	600	600	600
Overall Length to Fork Face	L mm	3507	3568	3647	3970	4040
Truck Overall Width	W mm	2108	2108	2108	2230	2230
Height of Overhead Guard	H mm	2455	2455	2455	2648	2648
Minimum Turning Radius	R mm	3301	3331	3380	3610	3680
Travel Speed, Loaded	km/h	29.6	29.1	28.5	29.8	27.7
Lifting Speed, Loaded	mm/s	500	490	445	430	430
Wheel Base	mm	2250	2250	2250	2500	2500
Engine Models		DB58S	DB58S	DB58S	DB58S	DB58S
Rated Power of Engine	kW/rpm	74/2200	74/2200	74/2200	74/2200	74/2200
Max Torque	kgf.m/rpm	37/1600	37/1600	37/1600	37/1600	37/1600
Displacements	cc	5785	5785	5785	5785	5785
Transmission type		Auto Shift	Auto Shift	Auto Shift	Auto Shift	Auto Shift
Transmission no. speeds forward/reverse		3/3	3/3	3/3	3/3	3/3

	Sales Model	D50S-5	D60S-5	D70S-5	G50S-5	G60S-5	G70S-5
Rated Load Capacity	kg	5000	6000	7000	5000	6000	7000
Load Center	mm	600	600	600	600	600	600
Overall Length to Fork Face	L mm	3507	3568	3647	3507	3568	3647
Truck Overall Width	W mm	2108	2108	2108	2108	2108	2108
Height of Overhead Guard	H mm	2455	2455	2455	2455	2455	2455
Minimum Turning Radius	R mm	3301	3331	3380	3301	3331	3380
Travel Speed, Loaded	km/h	25	24.5	24	24	23.8	23.6
Lifting Speed, Loaded	mm/s	415	415	415	380	380	380
Wheel Base	mm	2250	2250	2250	2250	2250	2250
Engine Models		DB58S	DB58S	DB58S	G643,G643E	G643,G643E	G643,G643E
Rated Power of Engine	kW/rpm	69/2400	69/2400	69/2400	69/2450	69/2450	69/2450
Max Torque	kgf.m/rpm	33/1600	33/1600	33/1600	31/1400	31/1400	31/1400
Displacements	cc	5785	5785	5785	4294	4294	4294
Transmission type		Power Shift	Power Shift	Power Shift	Power Shift	Power Shift	Power Shift
Transmission no. speeds forward/reverse		2/2	2/2	2/2	2/2	2/2	2/2